



Power Pack™ - Hydraulic Power Unit

For Tractors 30-75 PTO Horsepower



3,000 p.s.i. pressure relief valve protects system components from pressure spikes.



Oversized 10 micron in-tank filter protects system from contamination while maximizing performance.



Supercharged Hydraulics for Compact Tractors...

This industrially built and designed 3-point auxillary hydraulic unit allows you to operate tractors that don't generate enough hydraulic horsepower on their own. This self-contained unit produces enough gallons per minute allowing you to operate these hydraulically driven attachments, thus expanding the versatility and value to your tractor loader.

The hydraulic pump offers superior performance over any of our competitors because it generates higher gallons per minute and line pressure. This allows for a wider range of attachments to be used.



Optional high capacity oil cooler with thermostatically controlled 12 volt fan maintains proper oil temperature with low pressure loss, extending the life of the components. Internal bypass valve protects the cooler from over pressurizing.



Optional high capacity oil cooler

25 gallon, heavy-duty, 11 gauge steel tank equipped with internal baffle that helps cool and conditions the oil

Conveniently located drain hole allows for easy changing of oil

Prices and specifications subject to change without notice.



1-866-428-8224

www.quickattach.com



F.O.B. THE FACTORY



SKID STEER



MINI SKID STEER



COMPACT TRACTOR



UTV

Power Pack

- HP15 - #900900
- HP20 - #900901
- HP24 - #900902




Optional 3/4" hoses are rated for 3,000 psi from pump to front of loader



Built-in mounting brackets for optional Oil Cooler

Heavy-duty industrial gearbox and pump maximizes the flow rate and pressure, generating 3,000 psi

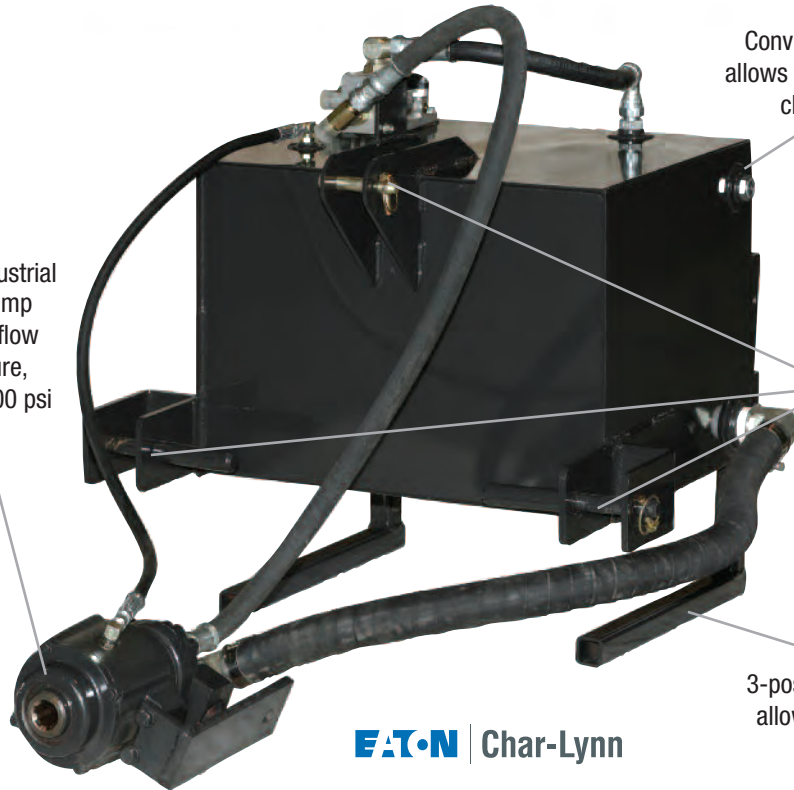

Convenient sight gauge allows for quick and easy checking of oil level

Category 1 & 2 Hitch is Quick Hitch compatible

Convenient, 3-position storage legs allow for easy hookup and storage

EAT-N | Char-Lynn

AVAILABLE OPTIONS

- Industrial High Performance Oil Cooler
- 15' Hose
- 18' Hose

STANDARD SPECIFICATIONS

HP15	15 GPM @ 3000 psi 30-43 PTO HP Range
HP20	20 GPM @ 3000 psi 44-53 PTO HP Range
HP24	24 GPM @ 3000 psi 54-75 PTO HP Range
PTO Input	540 RPM at Pump
Hitch Category	1 & 2
Planetary Gear Box	Industrial
Gear Pump	High Pressure
Reservoir Capacity (gallons)	25
In-line Return Filter	10 micron
Tank Construction (steel)	11 ga.
Case Drain	
Pressure Relief Valve	
Hydraulic Hoses & Fittings	
Oil Level Sight Gauge	
Adjustable Storage Stands	
Shipping Weight 350 lbs.	



"Be alert and of sober mind. Your enemy the devil prowls around like a roaring lion looking for someone to devour." Peter 5:8

Phones open 24 hours a day, 7 days a week...