



Quick Snow-Away™ Mini

Model 1600 Snowblower

FEATURES

- Replaceable bolt-on high-carbon steel cutting edge
- Hydraulic control valve with electric solenoid controls all chute functions
- Easily-adjustable depth shoes



Blowin' Away...

This is the perfect blizzard battler. A quality built blower that really works! The Quick Snow-Away Snowblower meets the tough demands of your mini skid-steer throwing snow up to 25' while clearing paths down to the ground. Featuring a No-Freeze-Up chute design! Two important factors must be considered when purchasing a snow blower for your skid steer loader – gallons per minute and hydraulic pressure (psi) are very important to the ultimate performance and your satisfaction. Quick Attach® strongly recommends discussing these factors with us before purchasing a snowblower attachment for any mini skid steer. Every Quick Attach® snowblower is custom engineered to provide maximum performance for each mini skid steer make and model.

Prices and specifications subject to change without notice.



1-866-428-8224

www.quickattach.com



F.O.B. THE FACTORY



SKID STEER



MINI SKID STEER



COMPACT TRACTOR




UTV

Quick Snow-Away
#900455

Hydraulic chute rotation is standard equipment. The Quick Attach™ design eliminates metal-to-metal contact between the blower and the rotating chute base, preventing freeze-up under any conditions.

EATON | Char-Lynn

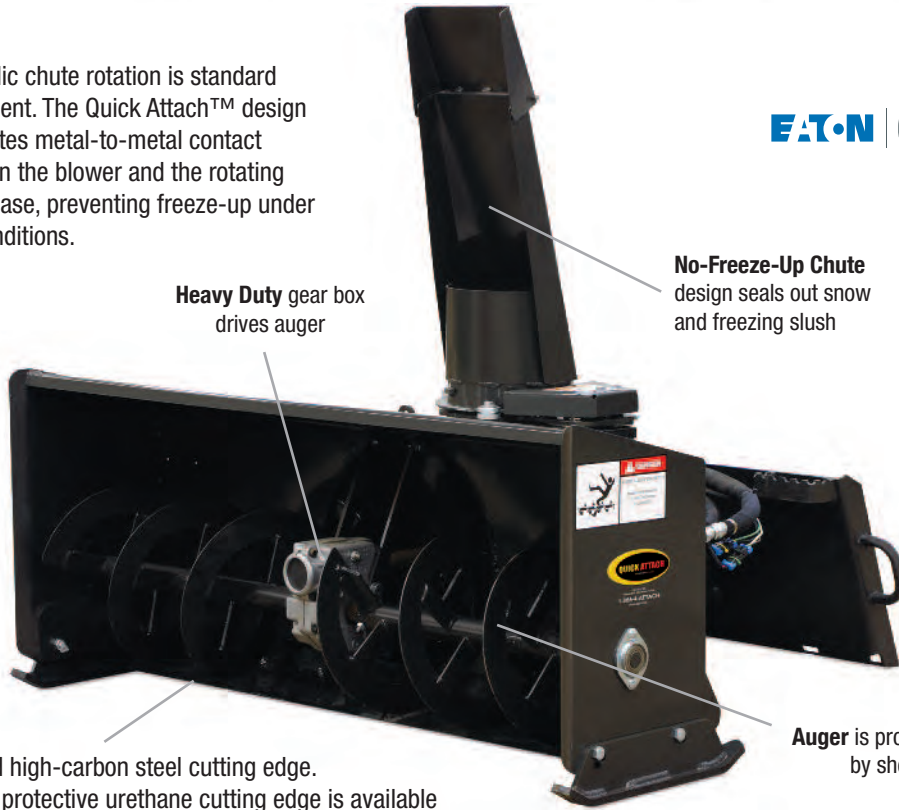

Heavy Duty gear box drives auger

No-Freeze-Up Chute design seals out snow and freezing slush

Standard high-carbon steel cutting edge. Optional protective urethane cutting edge is available

Auger is protected by shear pin



Wire harness for hydraulic models with attachment controls.



Toggle Control Harness is required if skid steer is **NOT** equipped with attachment control system.

AVAILABLE OPTIONS

- Toggle Control Harness
- Loader Specific Wire Harness
- Urethane Cutting Edge
- Factory Installed Faster Flat-Faced Couplers
- Factory Installed Parker Flat-Faced Couplers
- Available Mounting Kits:
 - ASV/Terex (RC/PT30)
 - Bobcat (MT-52/55, 463/S70)
 - Toro Dingo / Vermeer / Boxer / Ditch Witch / Ramrod / Kanga
 - Universal Mounting Plate for skid steers with up to 1000# R.O.C. (rated operating capacity) and within rated flow

STANDARD SPECIFICATIONS

Stage	2
Width of Cut	53"
Cutting Height	22"
Cutting Edge	3/8" x 3" Bolt-on
Skid Shoes	Adjustable
Auger Diameter	12" Open Flight
Fan Diameter	16" 4-Blade
Chute Rotation	Hydraulic
Pressure Relief	Fan Only
Casting Distance	up to 25'
Approx. Ship. Weight	418#
Mounting Plate	Mini Skid Steer
Hoses	Included
Hyd. Flow Req.	10-14 GPM



"Greater love has no one than this: to lay down one's life for one's friends." John 15:13

Phones open 24 hours a day, 7 days a week...